


## Posso inserire un indirizzo email in blacklist?

Dario Lombardi - 2017-03-21 - Hosting cPanel

Puoi inserire un indirizzo di posta o un intero dominio in blacklist accedendo al cPanel e cliccando dalla sezione E-mail sulla funzione Apache SpamAssassin.

Ti troverai in questa schermata dove dovrai cliccare su "Configurare Apache SpamAssassin":

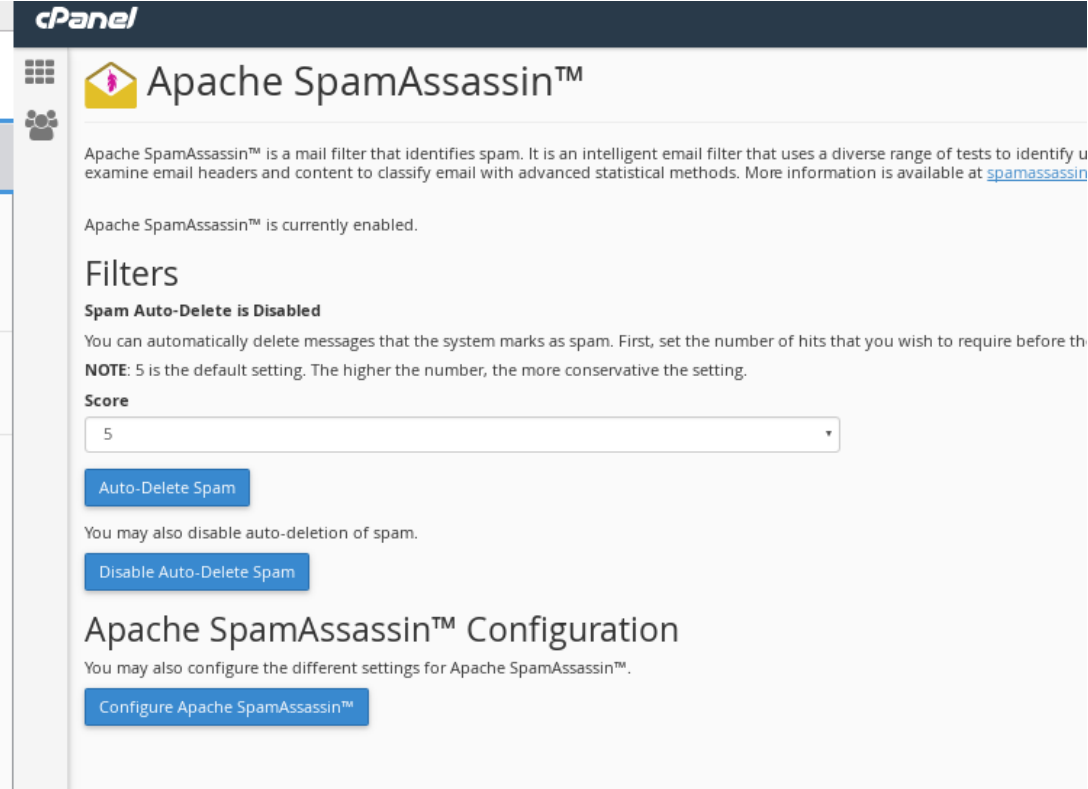

The screenshot shows the cPanel interface for Apache SpamAssassin configuration. The page title is "Apache SpamAssassin™". Below the title, there is a brief description: "Apache SpamAssassin™ is a mail filter that identifies spam. It is an intelligent email filter that uses a diverse range of tests to identify and examine email headers and content to classify email with advanced statistical methods. More information is available at [spamassassin](#)".

Below the description, it states: "Apache SpamAssassin™ is currently enabled."

The "Filters" section is titled "Spam Auto-Delete is Disabled". It explains: "You can automatically delete messages that the system marks as spam. First, set the number of hits that you wish to require before the system automatically deletes them. **NOTE:** 5 is the default setting. The higher the number, the more conservative the setting."

Under "Score", there is a dropdown menu currently set to "5".

There are two buttons: "Auto-Delete Spam" and "Disable Auto-Delete Spam".

The "Apache SpamAssassin™ Configuration" section states: "You may also configure the different settings for Apache SpamAssassin™." and includes a button "Configure Apache SpamAssassin™".

Ora inserisci l'indirizzo di posta o tutto il dominio che vuoi mettere in blacklist in uno dei campi `blacklist_from`, ad esempio `email@dominio1.com` o `*.@dominio2.com`:

Used to specify addresses which send mail that is often tagged (incorrectly) as non-spam, but which the user doesn't want. Same format as `whitelist_from`.

**blacklist\_from**

**blacklist\_from**

**blacklist\_from**

**blacklist\_from**

**blacklist\_from**

Set the number of hits required before a mail is considered spam. "n.nn" can be an integer or a real number. 5.0 is the default setting, and is quite aggressive; it would be suitable for a single-user setup, but if you're an ISP installing Apache SpamAssassin™, you should probably set the default to be more conservative, like 8.0 or 10.0

**required\_score**

Assign scores (the number of points for a hit) to a given test. Scores can be positive or negative real numbers or integers. "SYM-BOLIC\_TEST\_NAME" is the symbolic name used by Apache SpamAssassin™ for that test; for example, "FROM\_ENDS\_IN\_NU". If only one valid score is listed, then that score is always used for a test. If four valid scores are listed, then the score that is used depends on how Apache SpamAssassin™ is being used. The first score is used when both Bayes and network tests are disabled. The second score is used when Bayes is disabled, but network tests are enabled. The third score is used when Bayes is enabled and network tests are disabled. The fourth score is used when Bayes is enabled and network tests are enabled. Setting a rule's score to 0 will disable that rule from running.

**score**

**score**

**score**

**score**

**score**

Used to specify addresses which send mail that is often tagged (incorrectly) as spam; it also helps if they are addresses of big companies with lots of lawyers. This way, if spammers impersonate them, they'll get into big trouble, so it doesn't provide a shortcut around Apache SpamAssassin™. Whitelist and blacklist addresses are now file-glob-style patterns, so `friend@somewhere.com`, `*@isp.com`, or `*.domain.net` will all work. Specifically, `*` and `?` are allowed, but all other metacharacters are not. Regular expressions are not used for security reasons.

**whitelist\_from**

**whitelist\_from**

**whitelist\_from**

**whitelist\_from**

**whitelist\_from**

Ora basta cliccare su "save" ed il dominio sarà in blacklist.