


Knowledge base > Supporto Tecnico > Hosting cPanel > Posso inserire un indirizzo email in blacklist?

## Posso inserire un indirizzo email in blacklist?

Dario Lombardi - 2017-03-21 - Hosting cPanel

Puoi inserire un indirizzo di posta o un intero dominio in blacklist accedendo al cPanel e cliccando dalla sezione E-mail sulla funzione Apache SpamAssassin.

Ti troverai in questa schermata dove dovrai cliccare su "Configurare Apache SpamAssassin":

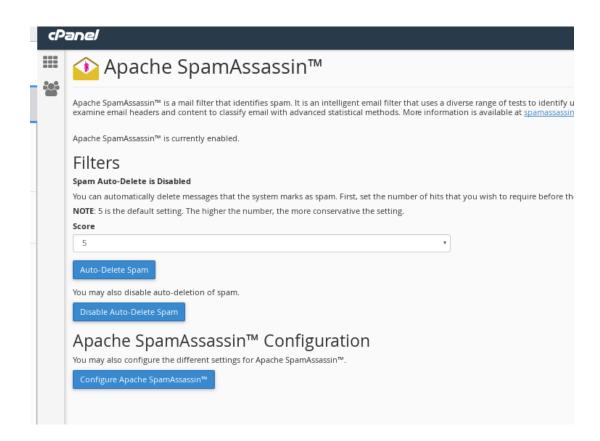

Ora inserisci l' indirizzo di posta o tutto il dominio che vuoi mettere in blacklist in uno dei campi blacklist from, ad esempio email@dominio1.com o \*.@dominio2.com:

<b>○</b> Apache SpamAssassin™	
Used to specify addresses which send mail that is often tagged (incorrectly) as non-spam, but which the user doesn't want. Same format as whitelist_from.	
blacklist_from	email@dominio1.com
blacklist_from	*.@dominio2.com
blacklist_from	
blacklist_from	
blacklist_from	
Set the number of hits required before a mail is considered spam. "n.nn" can be an integer or a real number. 5.0 is the default setting, and is quite aggressive; it would be suitable for a single-user setup, but if you're an ISP installing Apache SpamAssassin <sup>™</sup> , you should probably set the default to be more conservative, like 8.0 or 10.0	
required_score	5
Assign scores (the number of points for a hit) to a given test. Scores can be positive or negative real numbers or integers. "SYM-BOLIC_TEST_NAME" is the symbolic name used by Apache SpamAssassin <sup>tom</sup> for that test; for example, FROM_ENDS_IN_NU. If only one valid score is listed, then that score is always used for a test. If four valid scores are listed, then the score that is used depends on how Apache SpamAssassin <sup>tom</sup> is being used. The first score is used when both Bayes and network tests are enabled. The third score is used when Bayes is enabled and network tests are enabled. The third score is used when Bayes is enabled and network tests are disabled. The return of the score is used when Bayes is enabled. The first score is used when Bayes is enabled and network tests are disabled. The fourth score is used when Bayes is enabled and network tests are disabled that rule from running.	
score	
Used to specify addresses which send mail that is often tagged (incorrectly) as spam; it also helps if they are addresses of big companies with lots of lawyers. This way, if spammers impersonate them, they'll get into big trouble, so it doesn't provide a shortcut around Apache SpamAssassin™. Whitelist and blacklist addresses are now file-glob-style patterns, so friend@somewhere.com, *@isp.com, or *.domain.net will all work. Specifically, * and ? are allowed, but all other metacharacters are not. Regular expressions are not used for security reasons.	
whitelist_from	
Save	

Ora basta cliccare su "save" ed il dominio sarà in blacklist.